

SINGLE OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION

NJM2107 is a single operational amplifier of ultra miniature surface mount package.

NJM2107 has features of low operating supply voltage and low saturation output voltage. The NJM2107 is suitable for small electronic equipments and hybrid circuits.

■ FEATURES

- Operating Voltage ($V^+/V^- = \pm 1.0\text{V to } \pm 3.5\text{V}$)
- Low Output Saturation ($4V_{P-P}$ at single 5V supply)
- V^- Shield Plate between +Input and -Input
- Suitable Pin Arrangement for Application
- Mounted in Ultra Miniature 2.0 X 1.25mm (1/8 of DMP8 package)
- Bipolar Technology

■ PACKAGE OUTLINE




NJM2107F



NJM2107F3


■ PIN CONFIGURATION



PIN FUNCTION

- 1.+INPUT
- 2.V⁻
- 3.-INPUT
- 4.OUTPUT
- 5.V⁺

■ EQUIVALENT CIRCUIT

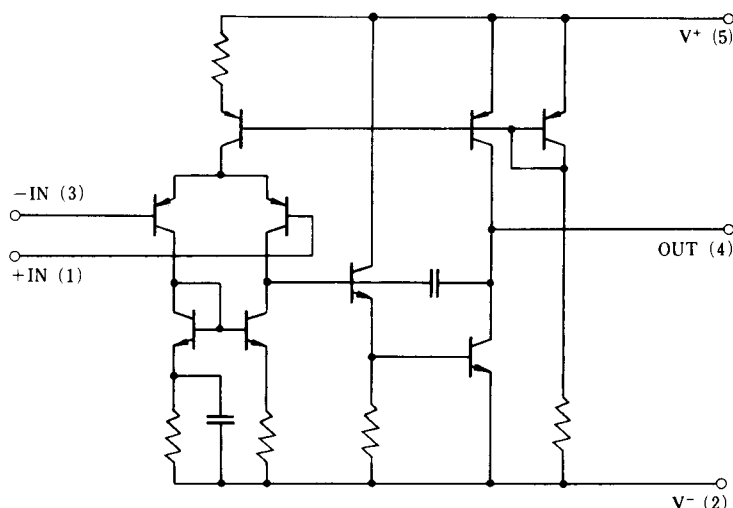

NJM2107

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+/V^-	± 3.5	V
Differential Input Voltage	V_{ID}	± 7	V
Input Voltage	V_{IC}	± 3.5	V
Power Dissipation	P_D	(SOT-23-5) 200 (SC88A) 250 (note1)	mW
Operating Temperature Range	T_{opr}	-40~+85	°C
Storage Temperature Range	T_{stg}	-40~+125	°C

(note1) On the PCB “ EIA/JEDEC (76.2×114.3×1.6mm, two layers, FR-4) “

■ ELECTRICAL CHARACTERISTICS


($V^+/V^- = \pm 2.5V$, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V_{IO}	$R_S=10k\Omega$	-	1	6	mV
Input Offset Current	I_{IO}	$I^+ - I^-$	-	5	200	nA
Input Bias Current	I_B		-	100	500	nA
Input Common Mode Voltage Range	V_{ICM}		± 1.5	-	-	V
Large Signal Voltage Gain	A_V	$R_L=10k\Omega, V_O=\pm 2.0V$	60	80	-	dB
Output Voltage Swing	V_{OM}	$R_L=2.5k\Omega$	± 2.0	± 2.2	-	V
Common Mode Rejection Ratio	CMR	$R_S \leq 10k\Omega$	60	80	-	dB
Supply Voltage Rejection Ratio	SVR	$R_S \leq 10k\Omega$	60	70	-	dB
Slew Rate	SR	$V_{IN} = \pm 1V_{P-P}, A_{CL} = +1$	-	3	-	V/ μs
Operating Current	I_{CC}		1	2	3	mA

■ TYPICAL CHARACTERISTICS


Voltage Gain, Phase vs. Frequency

($V^+/V^- = \pm 2.5\text{V}$, $T_a = 25^\circ\text{C}$)

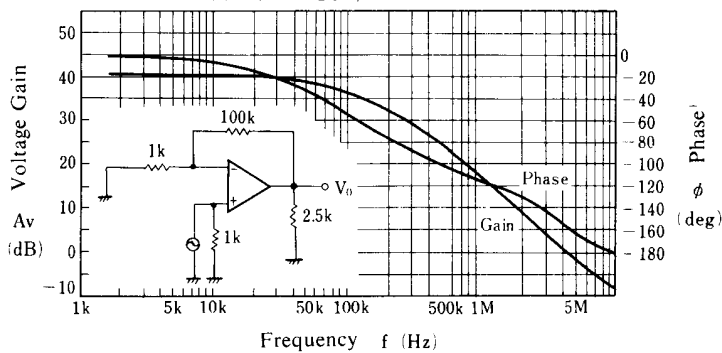


Maximum Output Voltage vs. Frequency

($V^+/V^- = \pm 2.5\text{V}$, $R = 2.5\text{k}\Omega$, $T_a = 25^\circ\text{C}$)

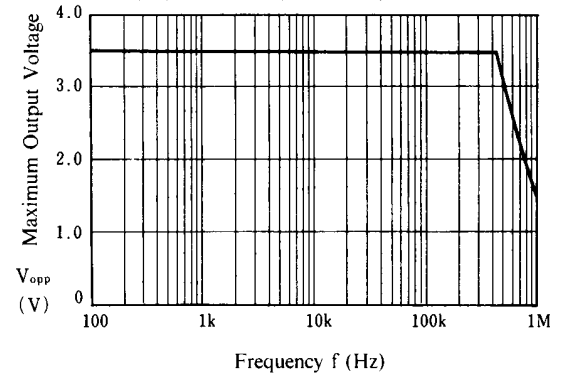


Voltage Gain, vs. Frequency

($V^+/V^- = \pm 2.5\text{V}$, $T_a = 25^\circ\text{C}$)

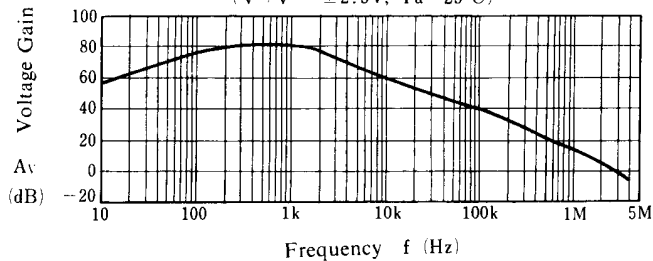


Test Circuit




Maximum Output Voltage Swing vs. Load Resistance

($V^+/V^- = \pm 2.5\text{V}$, $T_a = 25^\circ\text{C}$)

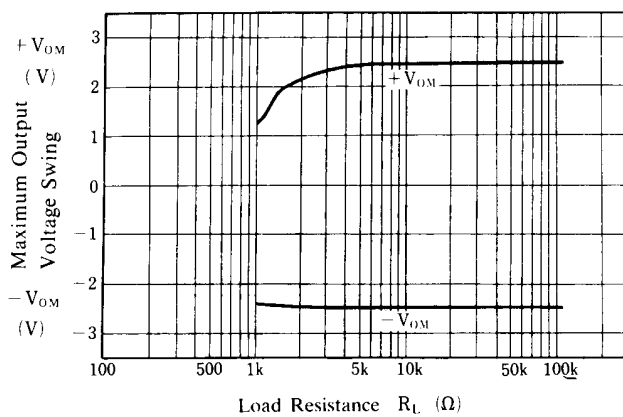


Input Noise Voltage vs. Input Resistance

($V^+/V^- = \pm 3.0\text{V}$, $T_a = 25^\circ\text{C}$)

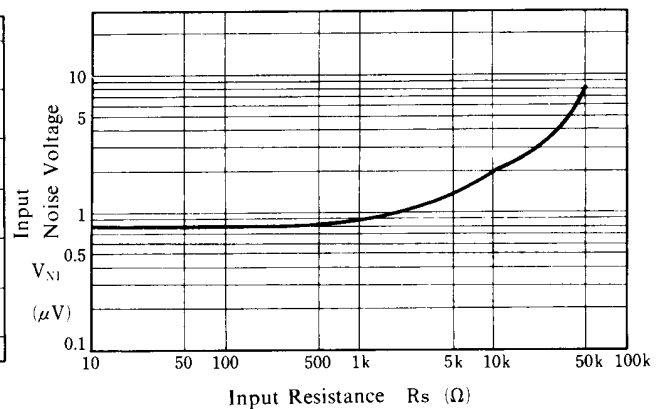


■ TYPICAL CHARACTERISTICS


Operating Current vs. Temperature

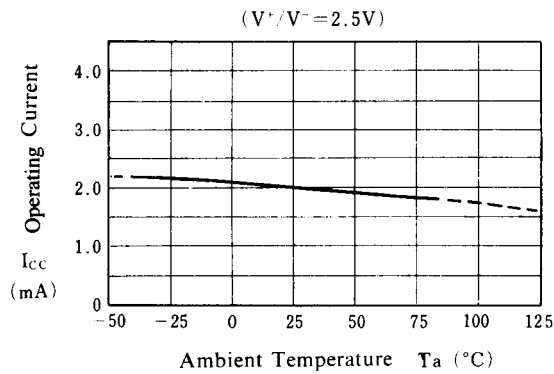


Maximum Output Voltage Swing vs. Temperature

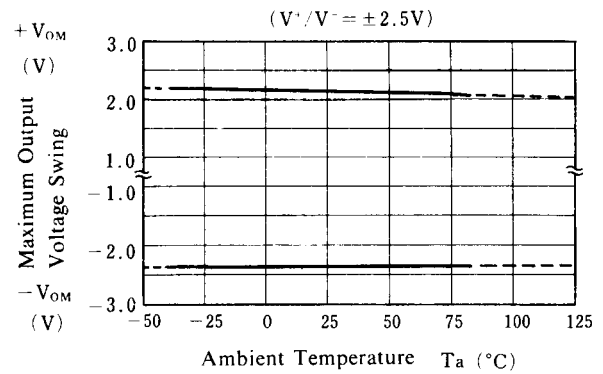


Input Offset Voltage vs. Temperature

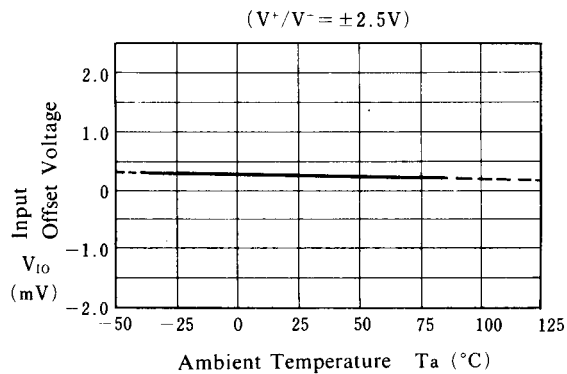


Input Bias Current vs. Temperature

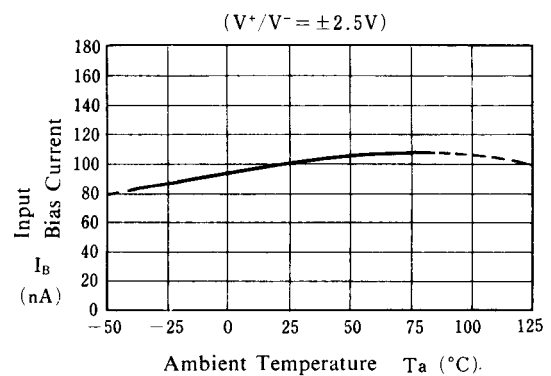



Operating Current vs. Operating Voltage

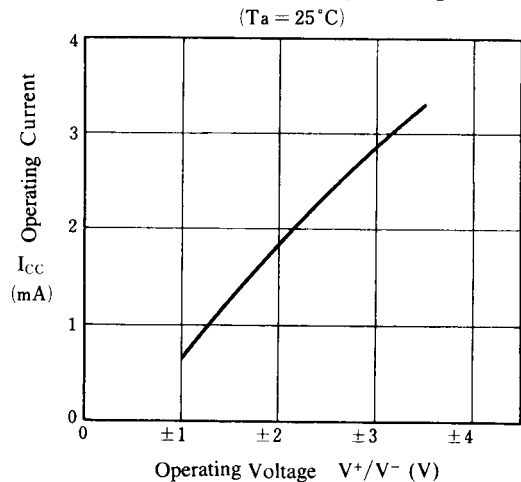

Maximum Output Voltage Swing vs. Operating Voltage

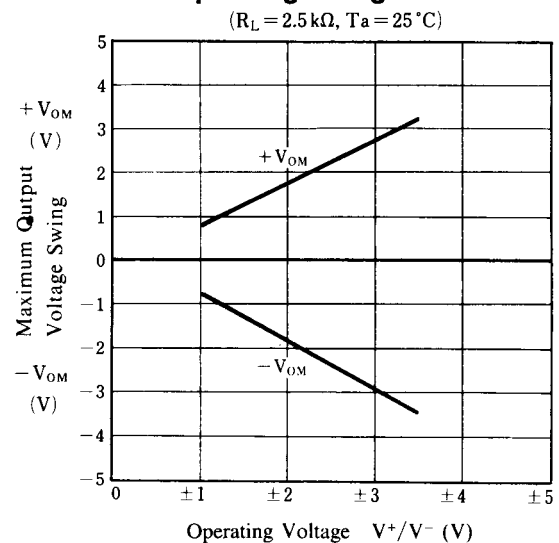

■ TYPICAL CHARACTERISTICS

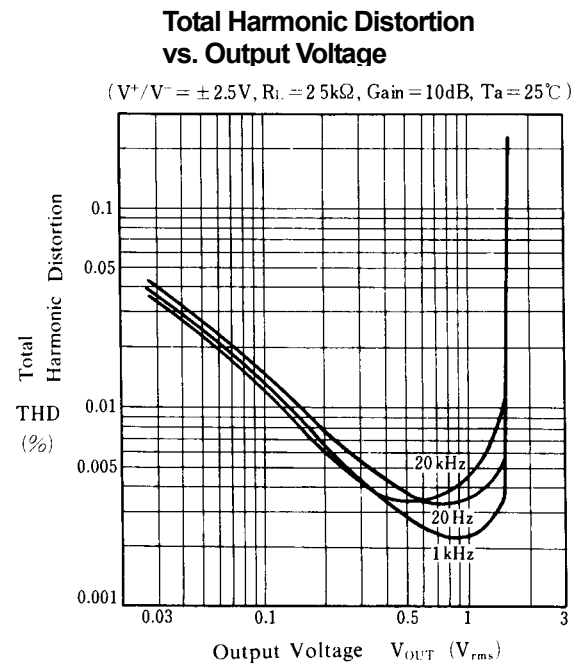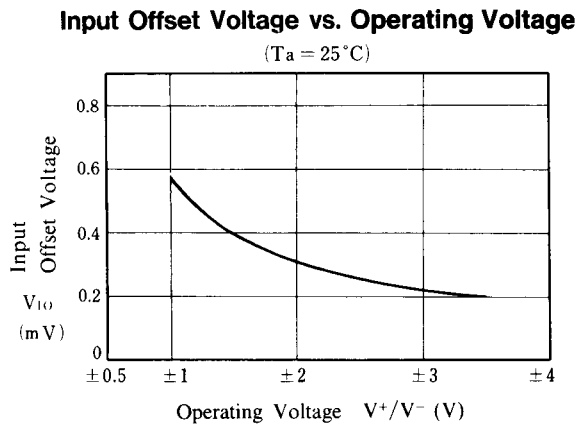

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2107F-TE1](#) [NJM2107F-TE2](#)