



Power choke coils

■ PCMB series,

Features

- Low profile (3.0 mm max) and small size (7.3mm x6.6mm)
- Occupying small board spaces
- Low loss and high saturating current.


Applications

- PCs, servers, power sources, mobile devices, flat screen TVs etc.


Specifications

* All made to order.

Dimensions • Electrical characteristics

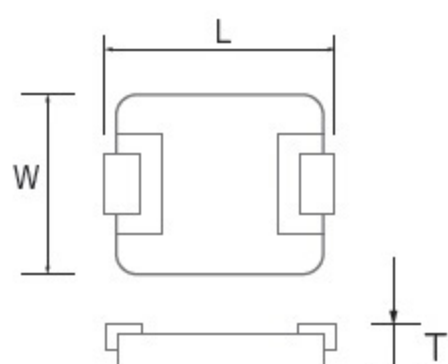

Equivalent circuits



Series name	Size LxWxT (mm)	LO Inductance (uH)	DC resistance (mΩ)		Rated current(A)	Saturating current(A)	Packaging
			Typical	Max			
PCMB042T- XXXMS	4.15×4.0 ×1.8	0.1	3.5	4	12	22	2,000 pcs/reel
		0.22	6	6.6	9	12.5	
		0.47	12.5	14	7	9.5	
		1.0	24	27	4.5	7	
		1.5	38	46	4	6	
		2.2	52	58	3	5	
		3.3	74	87	2.5	4	
		0.68	11	12	8.5	14	
PCMB053T- XXXMS	4.7×4.85 ×2.8	1.0	13	14	7	11	1,000 pcs/reel
		1.2	15	16	6.5	11	
		1.5	18	20	6	10	
		2.2	29	35	5.5	9	
		3.3	32	38	5	7	
		0.1	1.5	1.7	32.5	60	
		0.2	2.4	3.0	24	41	
		0.22	2.5	2.8	23	40	
PCMB063T- XXXMS	6.6×6.95 ×2.8	0.25	3.0	3.5	21	39	1,000 pcs/reel
		0.33	3.5	3.9	20	30	
		0.47	4.0	4.2	17.5	26	
		0.56	4.7	5	16.5	25.5	
		0.68	5	5.5	15.5	25	
		0.82	6.7	8	13	24	
		0.9	9	10	11	22	
		1.0	9	10	11	22	
		1.2	10	12	10	20	
		1.5	14	15	9	18	
		2.2	18	20	8	14	
		2.5	20	22	7	14	
		3.3	28	30	6	13.5	
		4.7	37	40	5.5	10	
		6.8	54	60	4.5	8	
		0.2	0.9	1.2	32	50	
PCMB065T- XXXMS	6.6×7.05 ×4.8	0.22	1.2	1.4	30	50	1,000 pcs/reel
		0.36	3.2	3.5	21	25	
		0.40	3.2	3.5	20	23	
		0.47	3.5	3.9	20	23	
		0.56	3.4	3.6	20	18	
		0.68	3.9	4.2	18	16	
		0.82	4.6	4.9	16.5	17	
		1.0	5.6	6.5	13	15	
		1.2	6	7.5	11	12	
		1.5	6.7	7.5	11	12	
		2.2	11.2	12.5	8	12	
		3.3	19.9	20.9	7	8	
		4.7	23	25	6.5	7	
		8.2	40	43	5.5	5.5	
		0.36	1.3	1.6	23	28	
		0.47	2.1	2.5	23	26	
PCMB103T- XXXMS	10×11.15 ×2.8	0.56	2.4	3	22	24	500 pcs/reel
		0.68	2.9	3.4	21	23	
		1.0	5.3	6	13	18	
		1.5	6.5	7.5	13	20	
		2.2	8	9	13	16	
		3.3	14.5	16	9	14	
		4.7	20.5	22.5	7	13	
		8.2	35	45	5	8.5	
		10	50	55	5	7.5	
		1.0	2.7	3.0	20	27	
PCMB103E- XXXMS	10×11.15 ×3.3	1.0	2.7	3.0	20	27	

Series name	Size LxWxT (mm)	LO Inductance (uH)	DC resistance (mΩ)		Rated current(A)	Saturating current(A)	Packaging
			Typical	Max			
PCMB104T- XXXMS	10×11× 3.8	0.15	0.5	0.65	40	75	500 pcs/reel
		0.19	0.7	0.8	38	60	
		0.22	0.9	1.0	35	60	
		0.36	1.05	1.2	30	50	
		0.39	1.1	1.2	31	45	
		0.41	1.1	1.3	30	60	
		0.47	1.6	1.8	26	40	
		0.56	1.6	1.8	25	33	
		0.68	2.4	2.7	22	39	
		0.88	2.7	3.0	20	38	
		1.0	3	3.3	18	28	
		1.5	3.8	4.2	16	32	
		1.8	4.5	5	15	15	
		2.0	5.2	5.8	14	14	
		2.2	6.0	7	12	18	
		3.3	10.8	11.8	10	16	
		4.7	17	20	8.5	15	
		5.6	20	23	7.5	14	
		6.8	22.5	25	6.5	9	
		10	27.5	30	7.5	8.5	
PCMB104E- XXXMS	10×11× 4.3	15	40	45	6.25	7.0	500 pcs/reel
		22	60	66	5.0	5.5	
		33	85	92	4.4	5.0	
		47	130	145	3.3	3.5	
		68	178	195	2.3	3.0	
		1.0	2.7	3.2	22	34	
		2.2	5.8	7	14	16	
		3.3	11	13.2	11	14.5	
PCMB105T- R47MS	10×11× 4.8	4.7	13.2	15	10	13	500 pcs/reel
		5.6	16	18.5	8.5	10.5	
		6.8	21.5	24	7.5	9.5	
		0.47	0.95	1.1	36	50	
PCMB133E- XXXMS	12.6× 13.45×3.3	0.22	1.1	1.3	38	65	500 pcs/reel
		0.33	1.3	1.5	36.5	62	
		0.39	1.1	1.3	38	65	
		0.47	1.7	2	32	55	
		0.56	1.8	2.2	29	51	
		0.62	1.8	2.2	29	51	
		0.68	2.3	2.5	28	49	
		1.0	3.3	3.5	24	40	
		1.5	5.1	5.5	19	35	
		2.2	7.2	8.0	16	29	
		3.3	10	12	12	27	

Rated current : the current that increases the temperature by 40℃
Saturating current : The current that reduces inductance by 30% (PCMB)
※ Contact us for details.

Part numbering system

Size	Part code
042T=4.15*4.0*1.8mm, 053T=4.7*4.85*2.8mm	PCMB 13** -*** M S
063T=6.6*6.95*2.8mm, 065T=6.6*7.05*4.8mm	
103T=10*11.15*2.8mm, 104T=10*11*3.8mm	
104E=10*11*4.3mm, 133E=12.6*13.45*3.3mm	
Inductance value (R56=0.56mH, R68=0.68mH)	
Inductance tolerance M=±20%	
Material : refer to the table for electrical characteristics	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Susumu:

[PCMC042T-1R0MN](#) [PCMC042T-R10MN](#) [PCMC042T-R22MN](#) [PCMC042T-R47MN](#) [PCMC063T-R82MN](#)
[PCMC063T-R90MN](#) [PCMC104T-1R5MN](#) [PCMC104T-2R2MN](#) [PCMC104T-R22MN](#) [PCMC104T-R68MN](#) [PCMC104T-R88MN](#) [PCMC133E-1R0MF](#) [PCMC133E-2R2MF](#) [PCMC133E-R56MF](#) [PCMC133E-R68MF](#) [PCMC135T-1R0MF](#)
[PCMC135T-1R5MF](#) [PCMC135T-2R2MF](#) [PCMC135T-3R3MF](#) [PCMC135T-R36MF](#) [PCMC135T-R47MF](#) [PCMC135T-R50MF](#) [PCMC135T-R56MF](#) [PCMC135T-R62MF](#) [PCMC135T-R68MF](#) [PCMC063T-1R0MN](#) [PCMC063T-1R2MN](#)
[PCMC063T-1R5MN](#) [PCMC063T-2R2MN](#) [PCMC063T-3R3MN](#) [PCMC063T-4R7MN](#) [PCMC063T-R10MN](#) [PCMC063T-R22MN](#) [PCMC063T-R33MN](#) [PCMC063T-R47MN](#) [PCMC063T-R68MN](#) [PCMC063B-100MN](#) [PCMC063B-8R2MN](#)
[PCMC063T-6R8MN](#)