

MRC series

C5-M1x

11-pin, power relay, 1-pole, magnetic blow out, faston

RELECO

Type	C5-M1x/ ... V Power relays, DC application 1 pole, NO, magnetic blow out			
Maximum contact load	16 A/400 V AC1 3,6 A/110 V DC13	10 A/220 V DC1 2 A/220 V DC13		

Contacts

Material	Standard	Code 0	AgNi
Rated current			16 A
Switch-on current max. (20 ms)			40 A
Switching voltage max.			400 V
AC load			4 kVA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance $\pm 10\%$
Pick-up voltage	$\geq 0,8 \times U_N$
Release voltage	$\geq 0,1 \times U_N$
Nominal power	2,4 VA (AC)/1,3 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	65	100	12	110	108
48	286	50	24	443	54
115	1K7	21	48	1K8	27
230	6K8	10	110	9K	12
400	18K8	6	220	34K5	6,5

Insulation

	Volt rms, 1 min
Contact open	4000 V
Contact/contact	4 kV
Contact/coil	4 kV
Insulation resistance at 500 V	$\geq 3 \text{ G}\Omega$
Insulation, IEC 61810-5	4 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)...60 °C / -40 ... 80 °C
Pick-up time/bounce time	20 ms/ ≤ 3 ms
Release time/bounce time	10 ms/ ≤ 1 ms
Mechanical life	AC: 10 Mill./DC: 20 Mill. switching cycles
AC voltage endurance at rated load	≥ 100000 switching cycles
Switching frequency at rated load	$\leq 1200/\text{h}$
Protection class	IP40
Weight	90 g

Standard types

AC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)

LED

RC suppresor

DC 24, 48, 110, 220

LED

Free wheeling diode

Polarity and free wheeling diode

AC/DC bridge rectifier 24 V, 48 V, 60 V

"..." Enter the voltage for full type designation

C5-M10/AC ... V

C5-M10X/AC ... V

C5-M10R/AC ... V

C5-M10/DC ... V

C5-M10X/DC ... V

C5-M10DX/DC ... V

C5-M10FX/DC ... V

C5-M10BX/UC ... V

Accessories

Socket:

Operational accessories (blanking plug):

S5-S, S5-L, S5-P, S5-P0

SO-NP, SO-OP



Connection diagram

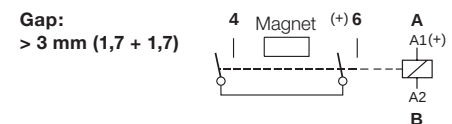


Fig. 1 AC voltage endurance



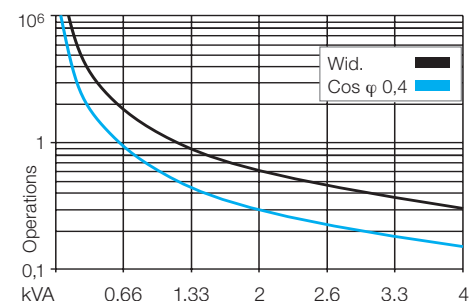


Abb. 2 DC voltage endurance

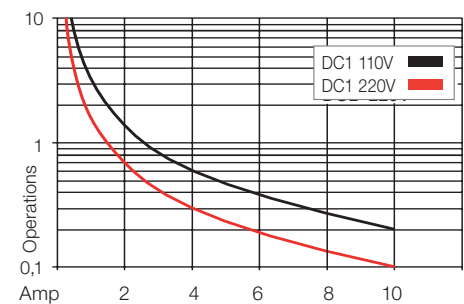

Dimensions [mm]

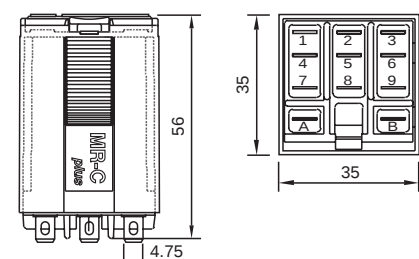

Technical approvals, conformities



IEC 61810; EN 60947